

UWD-1048

Ultra Wide High-brightness 48.5" Display



Features

- 48.5 inch color TFT LCD Display with LED Backlight
- Special aspect ratio 16:3, wide resolution 3840x720
- High Brightness 1000 nits, Sunlight Readable
- HDMI, DisplayPort Interface
- 24V DC, Low Power Consumption




Specifications

Display	
Screen size	48.5"
Display Area	1209.6 (H) x 226.8 (V)
Brightness (cd/m2)	1000
Resolution	3840 x 720
Aspect Ratio	16:3
Contrast Ratio	3100 : 1
Pixel Pitch (mm)	0.315 (H) x 0.315 (V)
Pixel Per Inch (PPI)	81
Viewing Angle	178 (H) x 178 (V)
Color Saturation (NTSC)	82%
Display Colors	1.07G
Response Time (Typical)	12ms
Panel Interface	V-by-One
Input Interface	▪ 1 HDMI ▪ 1 DisplayPort

OSD Key	
OSD Key	5 Keys (power Switch, Menu, +, -, Exit)
OSD Control	Brightness, Color, Contrast, Auto Tuning, H/V Position...etc
Power	
Input Power	24V
Power Consumption	64W
Mechanical	
Dimension	1235 x 252.2 x 70.3
Bezel Size	12.7/12.7/12.7/12.7 mm
Mounting	▪ VESA 300x75 ▪ VESA 650x100
Weight	10.5Kg
Environment	
Operating Temp.	-20°C to 60°C
Storage Temp.	-20°C to 60°C
EMC	CE, FCC

Dimensions


Unit : mm/ inch

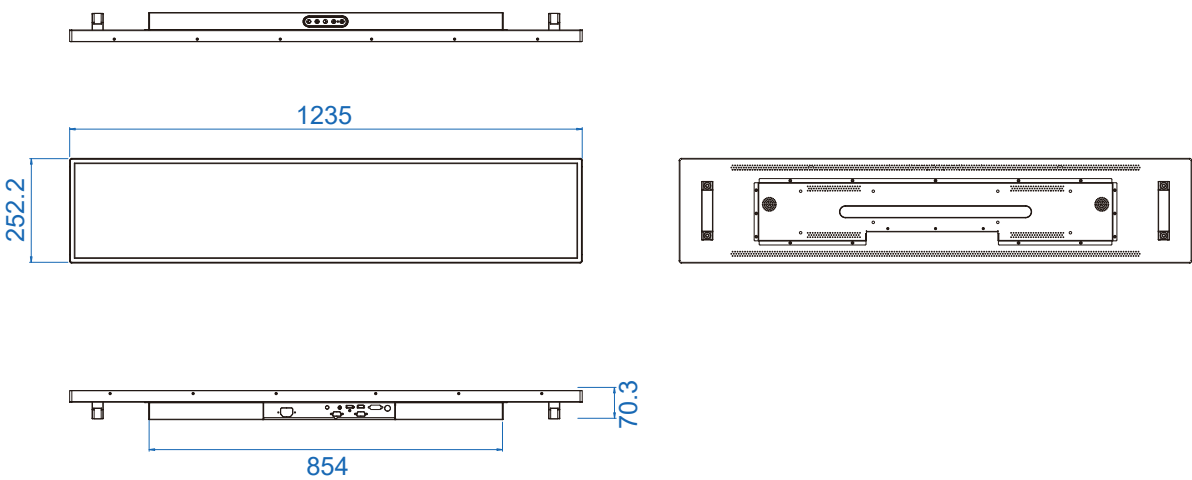

Top I/O



Bottom I/O

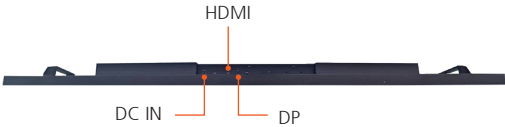

Order Information

ULD-1048	Ultra Wide 48.5" (16:3) Display, 1000nits Display
Accessories	
PWA-120WM4P1	120W, 24V, 90V AC to 264V AC Power Adapter with 4-pin Mini-DIN Connector