

RCX-1422R

Workstation-grade 9th Intel® Xeon®/Core™ i7/i5/i3 Fanless Robust Computing System with Intel® C246 Chipset, 2 GigE LAN, 1 PCIe x16, 1 PCIe x4, 2 PCI, 4 Front-access SSD Tray, 6 USB 3.1 Gen 2, 4 COM, 2 SIM, 32 Isolated DIO, High Performance, Expandable, Rugged, -40°C to 75°C Extended Temperature



Features

- 8 Cores 9th Generation Intel® Xeon®/Core™ i7/i5/i3 (Coffee Lake Refresh) with workstation-grade Intel® C246 Chipset
- 4 DDR4 2666MHz Memory, up to 128GB (ECC/Non-ECC)
- 6 ports external USB 3.1 Gen 2 support up to 10Gbps data transfer
- Rugged & Fanless design, -40°C to 75°C Operating Temperature
- 2 External SIM Socket for WiFi/4G/3G/LTE/GPRS/UMTS
- 4 Front-access 2.5" SSD Tray, RAID 0, 1, 5, 10 supported
- 1 PCIe x16, 1 PCIe x4, 2 PCI
- Supports max 300W Power Budget for independent graphics operation
- 32 Isolated DIO, 6 USB 3.1, 4 COM RS-232/422/485
- 2 M.2 Socket : 1 M.2 Key M, 1 M.2 Key E
- 6V to 36V DC Power Input with 80V Surge Protection
- Configurable Ignition Power Control




Specifications

System	
Processor	Intel® Xeon®/Core™ i7/i5/i3 Processor (CFL-R S/CFL-S)
Chipset	Intel® C246
BIOS	AMI
SIO	IT8786E
Memory	4 DDR4 2666MHz SO-DIMM, up to 128GB (ECC/Non-ECC)
I/O Interface	
Serial	4 COM RS-232/422/485 (ESD 8KV)
USB	<ul style="list-style-type: none"> ▪ 6 USB 3.1 Gen 2 (External) ▪ 1 USB 2.0 (Internal)
Isolated DIO	32 Isolated DIO : 16 DI, 16 DO
LED	Power, HDD, Wireless
SIM Card	2 External SIM Card Socket
Expansion	
Mini PCIe	2 Full-size for PCIe/USB/External SIM Card/mSATA
M.2	1 M.2 Key E Socket
PCIe	1 PCIe x16, 1 PCIe x4
PCI	2 PCI
Graphics	
Graphics Processor	Intel® UHD Graphics 630
Interface	<ul style="list-style-type: none"> ▪ 1 DVI-I : Up to 1920 x 1200 @60Hz ▪ 1 DisplayPort : Up to 4096 x 2304 @60Hz ▪ 1 Digital Display (HDMI) : Up to 1920 x 1080 @60Hz
Storage	
SATA	4 SATA III (6Gbps) support SW RAID 0, 1, 5, 10
mSATA	2 SATA III (Mini PCIe Type, 6Gbps)
Storage Device	<ul style="list-style-type: none"> ▪ 4 Front-access 2.5" SSD/HDD Tray ▪ 1 M.2 Key M Socket (Internal)
Audio	
Audio Codec	Realtek ALC888S-VD, 7.1 Channel HD Audio
Audio Interface	1 Mic-in, 1 Line-out
Ethernet	
LAN 1	Intel® I219LM GigE LAN supports iAMT 12.0
LAN 2	Intel® I210 GigE LAN


Power	
Power Input	6V to 36V, DC-in
Power Interface	3-pin Terminal Block : V+, V-, Frame Ground
Ignition Control	16 Mode (Internal)
Remote Switch	3-pin Terminal Block
Surge Protection	Up to 80V/1ms Transient Power
Others	
TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Management	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.
Software Support	
OS	Windows 10, Linux
Mechanical	
Dimensions	250.4mm x 210.0mm x 172.0mm (9.86" x 8.27" x 6.77")
Weight	5.0 kg (11.0 lb)
Mounting	Wallmount by mounting bracket
Environment	
Operating Temperature	35W TDP CPU : -40°C to 75°C (-40°F to 158°F) 65W TDP CPU : -40°C to 55°C (-4°F to 131°F) 80W TDP CPU : -40°C to 45°C (-4°F to 113°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 75°C
Shock	<ul style="list-style-type: none"> ▪ IEC 60068-2-27 ▪ SSD : 50G @ wallmount, Half-sine, 11ms
Vibration	<ul style="list-style-type: none"> ▪ IEC 60068-2-64 ▪ SSD : 5Grms, 5Hz to 500Hz, 3 Axis
EMC	CE, FCC, EN50155, EN50121-3-2

Dimensions

Unit : mm/ inch

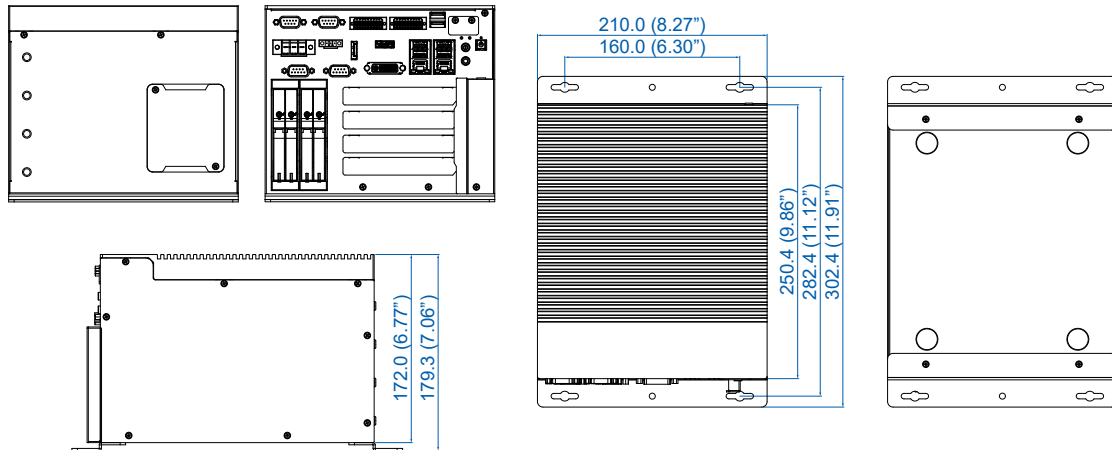

Front I/O

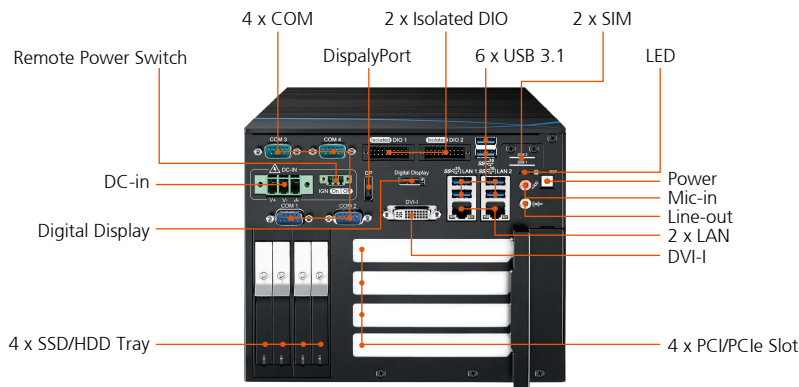

Order Information

RCX-1422R	RCX-1400, 2 GigE LAN, PCIe x16, 1 PCIe x4, 2 PCI, 4 SSD Tray, 4 COM, 6 USB 3.1, 2 SIM, Isolated DIO
------------------	---

Accessories

DDR4 32G	Certified DDR4 32GB 2666MHz RAM
DDR4 16G	Certified DDR4 16GB 2666/2400/2133 MHz RAM
DDR4 8G	Certified DDR4 8GB 2666/2400/2133 MHz RAM
DDR4 4G	Certified DDR4 4GB 2666/2400/2133 MHz RAM
PWA-160WB-WT	160W, 24V, 85V AC to 264V AC Power Adaptor with 3-pin Terminal Block (7.62mm pitch), Wide Temperature -30°C to +70°C
PWA-280WB-WT	280W, 24V, 85V AC to 264V AC Power Adaptor with 3-pin Terminal Block (7.62mm pitch), Wide Temperature -30°C to +70°C
PWS-480W-WT	480W, 24V, 90V AC to 305V AC Power Supply, Wide-Temp, IP65
PWS-600W1	600W, 24V, 90V AC to 264V AC Power Supply
PWS-600W-WT	600W, 28.8V, 90 to 305V AC Power Supply, Wide Temperature -40°C to +70°C
FAN Module	Fan Module for RCX-1400/RCX-1400F Series
FAN Sink	Fan Sink for RCX-1000 Series
PCIE HOLD-DOWN Kit	Hold Down Module for PCIe Card
TMK2-20P-100	Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm
TMK2-20P-500	Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm
TMB-TMBK-20P	Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting
4G Module	Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth	WiFi & Bluetooth Module with Antenna

CPU List

Series	CPU	Cores	GHz	TDP (W)	ECC RAM
Intel® Xeon®	E-2176G	6	4.6	80	Yes
	E-2124G	4	4.5	71	
	E-2278GE	8	4.7	80	
	E-2278GEL	8	3.9	35	
	E-2226GE	6	4.6	80	
Intel® Core™	i7-8700	6	4.6	65	N/A
	i7-8700T	6	4	35	
	i7-9700E	8	4.4	65	
	i7-9700TE	8	3.8	35	
	i5-8500	6	4.1	65	
	i5-8500T	6	3.5	35	
	i5-9500E	6	4.2	65	
	i5-9500TE	6	3.6	35	
	i3-8100	4	3.6	65	
	i3-8100T	4	3.1	35	
Yes	i3-9100E	4	3.7	65	
	i3-9100TE	4	3.2	35	

* The rights of all brand names, product names and trademarks belong to their respective owners. Copyright © 2023 Vecov Co., Ltd. All rights reserved.